


KISAE Transfer Switch

TR 15-120 (15A)

TR 20-120 (20A)

Specification:	TS 15-120	TS 20-120
AC Input		
Utility/Shore AC Input Voltage/Frequency	120 VAC/ 60 or 50 Hz	
Inverter AC Input Voltage	120 VAC/ 60 or 50 Hz	
AC Input current	15A max	20A max
Utility/Shore AC Input Connection	Hardwire cord AWG 16, 2 feet	Hardwire cord AWG 14, 2 feet
Inverter AC Input Connection	15A Power plug AWG 16, 5 feet	20A Power plug AWG 14, 5 feet
AC Output		
Load AC Output Voltage/Frequency	Same as Utility/Shore or Inverter AC Input	
Load AC Output	Hardwire cord AWG 16, 2 feet	Hardwire cord AWG 14, 2 feet
Load AC Output Protection (supplementary breaker)	15A	20A
Transfer Switch		
Transfer Time	< 100 ms	
Regulatory Compliance		
Markings	cETLus	
Conformance	Conforms to UL 1008	
KISAE product use	SW 1204, 1210 series	SW 1220 series

TS 15-120 and TS 20-120 Wiring Block Diagram

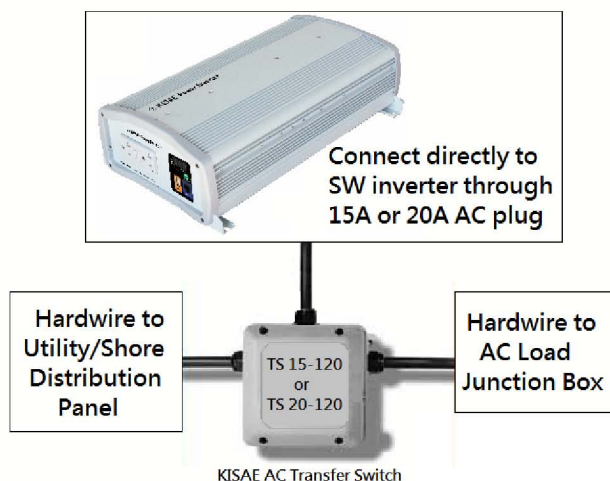

KISAE Technology Co. Ltd.
Room 206, 2nd Floor, Alliance Building,
130-136 Connaught Road Central,
Hong Kong

email: info@kisaetechlogy.com
www.kisaetechlogy.com