

# CPI 2590



# Cobra®

POWER INVERTER

**2500 Watts continuous power**  
5000 Watts peak power.

**3 Grounded AC outlets**  
Powers up three or more household appliances.

**2.1A USB port**  
Charge iPod®, Blackberry®, mobile phones, tablets and many other USB devices.

**Volt/Watt meter**  
Keep track of power usage.

**Pentagon Protection™**  
5 levels of protection against failures: thermal shutdown, reverse polarity protection, over-voltage shutdown, low voltage shutdown and low voltage alarm.

**PLUS:**

- Inductive Kick-Back Protection
- GFI Self-Test



[www.cobra.com](http://www.cobra.com)



# CPI 2590

Continuous power	2,500 watts
Surge power	5,000 watts
Optimum efficiency	88%
No-load draw	< 0.6 amp
Output waveform	Modified sinewave
Input voltage range	10-14.9 VDC
Output voltage range	115 VAC +/- 5%
Low voltage alarm	11.0 - 11.5 volts
Low voltage cut-off	10.0 - 10.5 volts
AC receptacles	3
USB Output	Yes
Cigarette lighter plug	N/A
Direct-to-battery cable with clips	N/A

Thermal shut-down	Yes
Reverse polarity protection	Yes
LED volt/amp meter	Yes
Warranty	2 Year
Package type	Gift carton
Product weight	6 lbs.
Product dimensions	10.50"L x 9.50"W x 3.75"H
Package dimensions	12.50"W x 10.03"H x 4.75"D
Master Pack Quantity	2
Master pack dimensions	18"H x 10.50"W x 10.75"D
Master pack weight	12.25 lbs.
UPC	0 28377 31368 4
Master pack barcode	5 0028377 31368 9

Application	Typical Watts
<b>USB Devices:</b>	
iPod	N/A
Blackberry	N/A
MP3 Player	N/A
<b>Appliances:</b>	
Can Opener	100
Electric Knife	100
12" 3-Speed Fan	250
Mixer/Blender	300
Food Processor	400
Portable Vacuum	550
Mini-Refrigerator	600
Toaster Oven	1000
Coffee Maker	1000
Microwave Oven	1000 MIN.
<b>Audio/Visual Equipment:</b>	
DVD Player	35 (est)
BluRay Player	35
Mini CD Changer System	50
15" LCD Flat Panel TV	156
19" LCD Flat Panel TV	168
22" LCD Flat Panel TV	168
26" LCD Flat Panel TV	170
32" LCD Flat Panel TV	170
2 Amp Stereo Amplifier	240
<b>Mobile Office Equipment:</b>	
Inkjet/Bubblejet Printer	40
Laptop Computer	50
Fax Machine	120
20" LCD Monitor	120
24" LCD Monitor	150
Laser Printer	800



Application	Typical Watts
<b>Battery Chargers:</b>	
Laptop Computer Charger	25
Cellular Phone Charger	25
Camcorder Charger	25
7.2V Cordless Drill Charger	25
Cordless Saw Charger	35
Hot Melt Glue Gun	40
<b>Power Tools:</b>	
Finishing Sander	190
1/4" Drill	300
Soldering Gun	300
6" Bench Grinder	400
790 F Heat Gun	400
3/8" Reversible Drill	700
10 Gallon Wet/Dry Vacuum	900
6" Circular Saw	950
Router	1000
1200° F Heat Gun	1000
Disk Sander	1200
14" Chain Saw	1200
<b>Pumps:</b>	
1/6 hp Submersible Sump Pump	880
1/4 hp Submersible Sump Pump	925
1/3 hp Submersible Sump Pump	1050
1/2 hp Submersible Sump Pump	1400



CPI A20  
Optional remote on/off switch



CPI A4000 BC  
Optional direct-to-battery cables

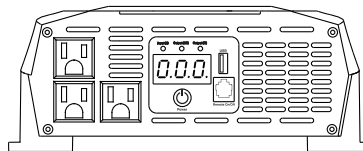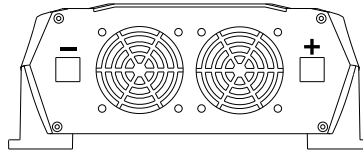

To determine the required wattage for a device. Look up the required Amps a device is rated. This Amperage is found on the device's I.D tag found on the back of the device. Multiply the Amps x Volts = Watts.

2015 Cobra Electronics Corporation, 6500 West Cortland Street, Chicago, IL 60707, USA

Cobra®, Nothing Comes Close to a Cobra®, Pentagon Protection® and the snake design are registered trademarks of Cobra Electronics Corporation, USA.

Cobra Electronics Corporation™ is a trademark of Cobra Electronics Corporation, USA.

iPod® is a registered trademark of Apple Computer Incorporated.

Blackberry® is a registered trademark of Research In Motion Limited Corporation, Canada.